

**Features :**

- Isolated mounting base 3000V~
- Solder joint technology with increased power cycling capability
- Space and weight saving

**Typical Applications**

- Various rectifiers
- DC supply for PWM inverter

$V_{RSM}$	$V_{RRM}$	品名
900V	800V	MD110D80S
1100V	1000V	MD110D100S
1300V	1200V	MD110D120S
1500V	1400V	MD110D140S
1700V	1600V	MD110D160S
1900V	1800V	MD110D180S

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	$T_J(^{\circ}\text{C})$	VALUE			UNIT
				Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Single side cooled, $T_c=100^{\circ}\text{C}$	150			110	A
$I_{F(RMS)}$	RMS forward current					173	A
$I_{RRM}$	Repetitive peak current	at $V_{RRM}$	150			8	mA
$I_{FSM}$	Surge forward current	10ms half sine wave $V_R=0.6V_{RRM}$	150			2.0	kA
$I^2t$	$I^2t$ for fusing coordination					20.0	$\text{A}^2\text{s} \times 10^3$
$V_{FO}$	Threshold voltage		150			0.80	V
$r_F$	Forward slope resistance					1.74	$\text{m}\Omega$
$V_{FM}$	Peak forward voltage	$I_{FM}=330\text{A}$	25			1.55	V
$R_{th(j-c)}$	Thermal resistance Junction to case	Single side cooled per chip				0.35	$^{\circ}\text{C}/\text{W}$
$R_{th(c-h)}$	Thermal resistance case to heatsink	Single side cooled per chip				0.20	$^{\circ}\text{C}/\text{W}$
$V_{iso}$	Isolation voltage	50Hz,R.M.S,t=1min, $I_{iso}:1\text{mA(max)}$		3000			V
$F_m$	Terminal connection torque(M5)			2.4		3.0	N·m
	Mounting torque(M6)			3.5		5.0	N·m
$T_{stg}$	Stored temperature			-40		125	$^{\circ}\text{C}$
$W_t$	Weight				95		g
Outline				M16			

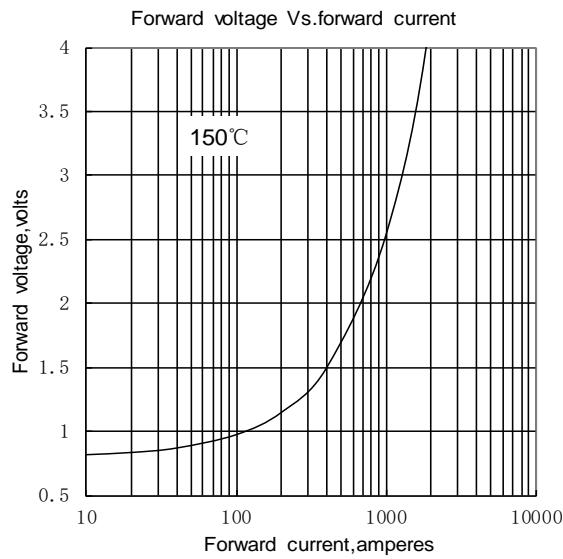


Fig1

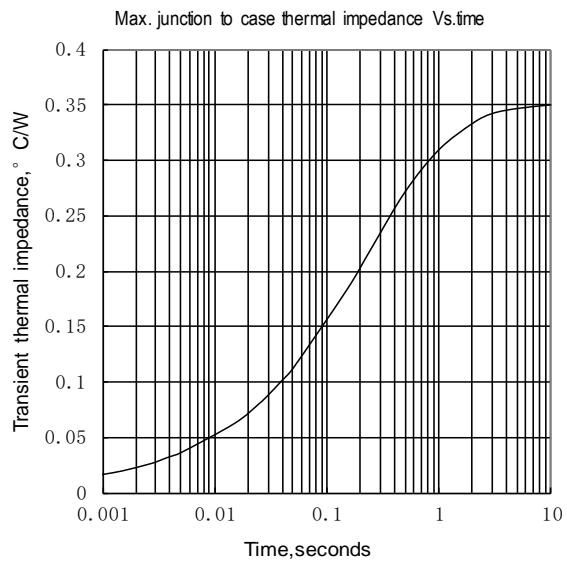


Fig2

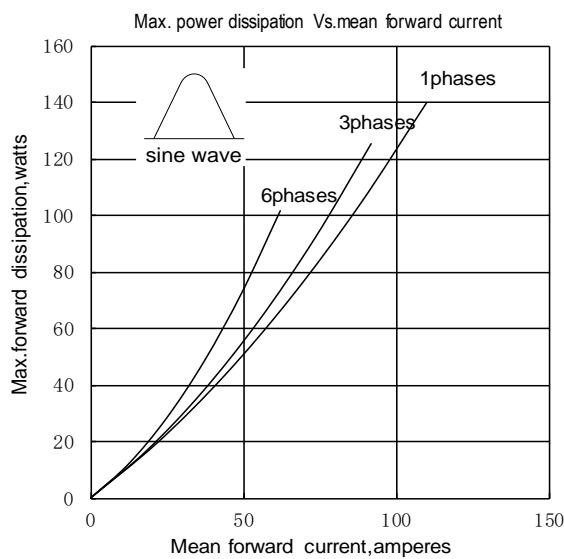


Fig3

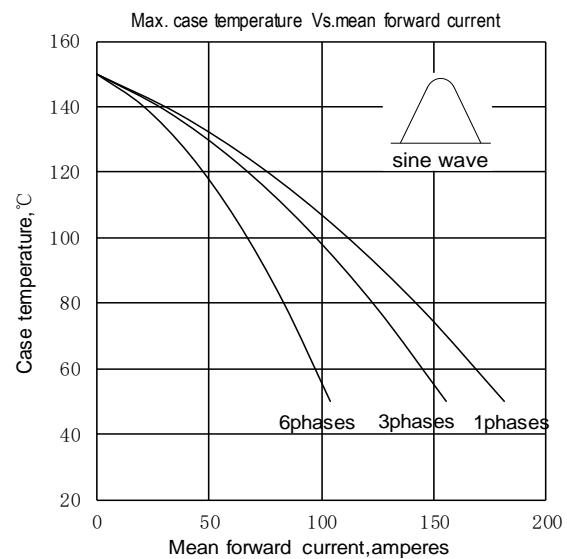


Fig4

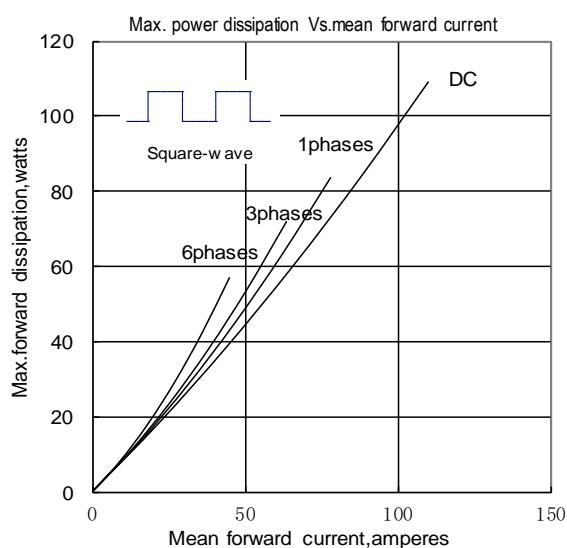


Fig5

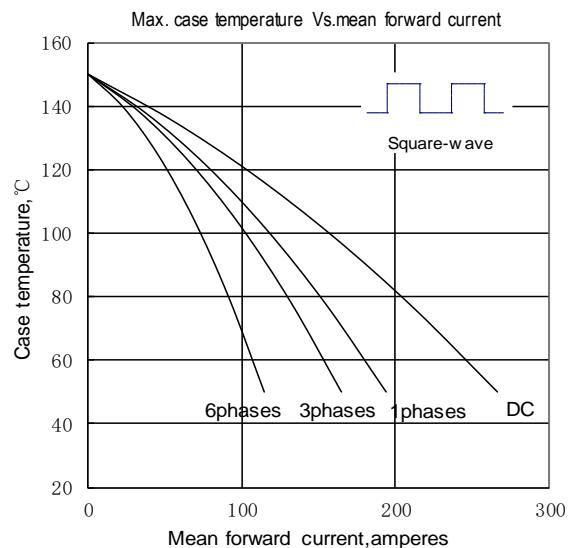


Fig6

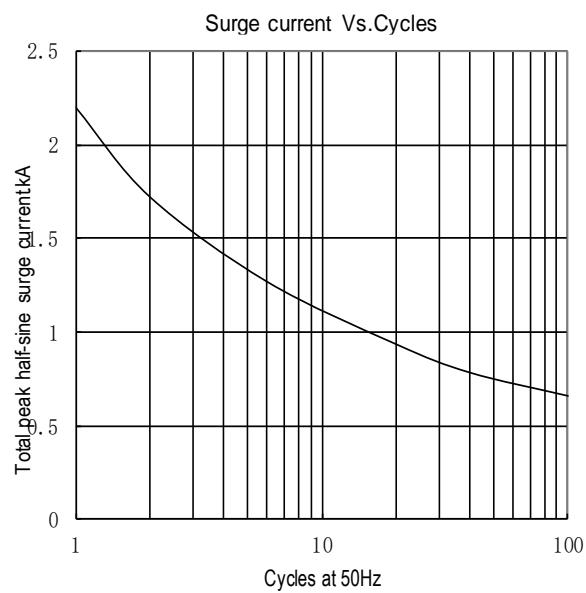


Fig.7


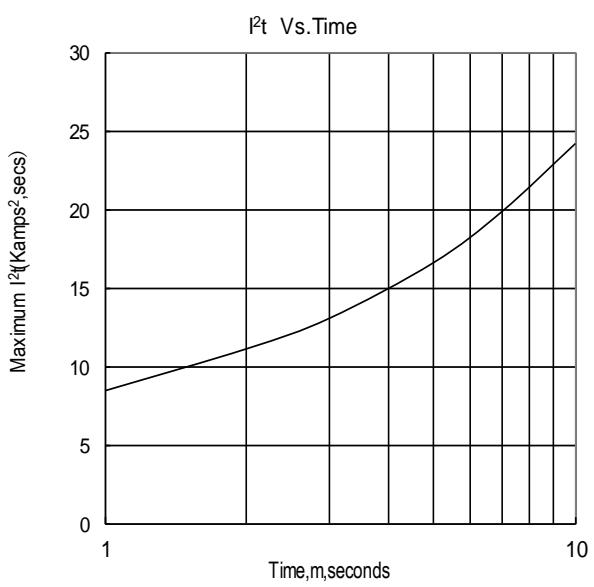


Fig.8



Unmarked dimensional tolerance :  $\pm 0.5\text{mm}$

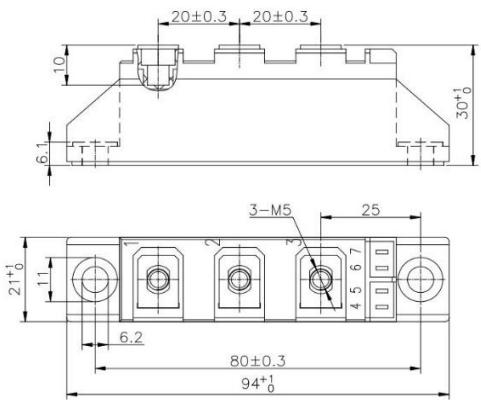