


Features

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

Typical Applications

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers

$I_{F(AV)}$ 1640 A
 V_{RRM} 4300~5000 V
 I_{FSM} 14 kA
 I^2t 980 10³A²S

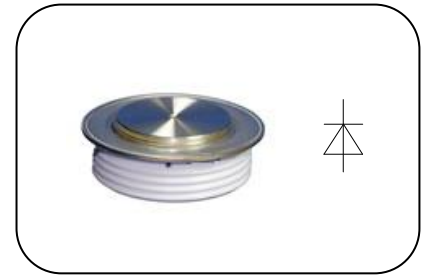

SYMBOL	CHARACTERISTIC	TEST CONDITIONS		T _j (°C)	VALUE			UNIT
					Min	Type	Max	
$I_{F(AV)}$	Mean forward current	180° half sine wave 50Hz Double side cooled,	T _C =85°C	150			1640	A
V_{RRM}	Repetitive peak reverse voltage	tp=10ms		150	4300		5000	V
I_{RRM}	Repetitive peak current	at V_{RRM}		150			100	mA
I_{FSM}	Surge forward current	10ms half sine wave		150			14	kA
I^2t	I^2t for fusing coordination	$V_R=0.6V_{RRM}$					980	A ² s*10 ³
V_{FO}	Threshold voltage			150			0.98	V
r_F	Forward slope resistance						0.25	mΩ
V_{FM}	Peak forward voltage	$I_{FM}=1500A, F=26kN$		150			1.36	V
Q_{rr}	Recovery charge	$I_{FM}=2000A, tp=2000\mu s, di/dt=-20A/\mu s, V_R=50V$		150		4000		μC
$R_{th(j-c)}$	Thermal resistance Junction to case	DC: double side cooled					0.020	°C /W
$R_{th(c-h)}$	Thermal resistance case to heatsink	Clamping force 26kN					0.005	
F_m	Mounting force				19		26	kN
T_{stg}	Stored temperature				-40		160	°C
W_t	Weight					440		g
Outline	P42							

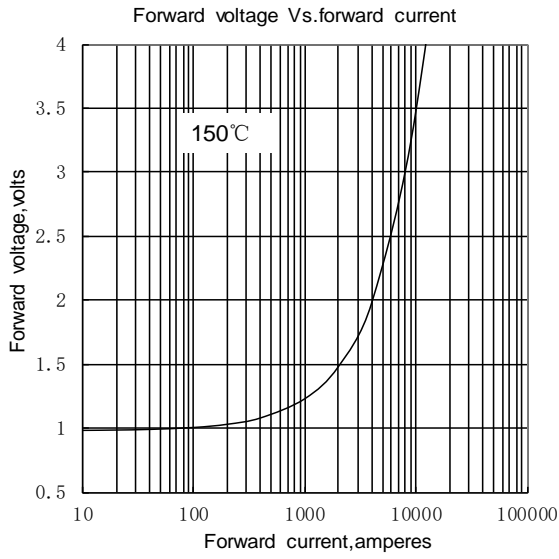


Fig.1

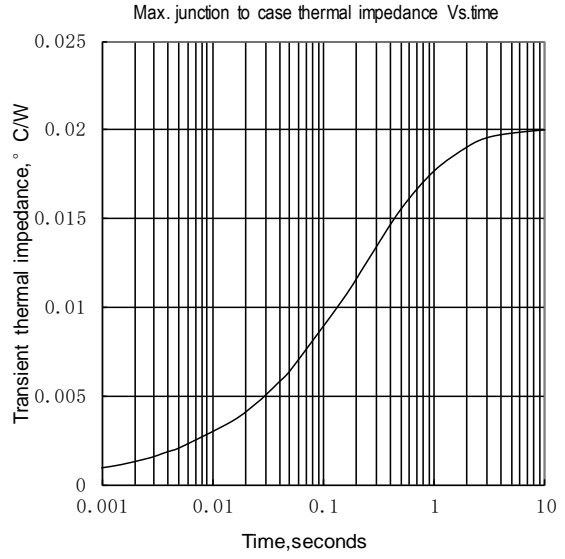


Fig.2

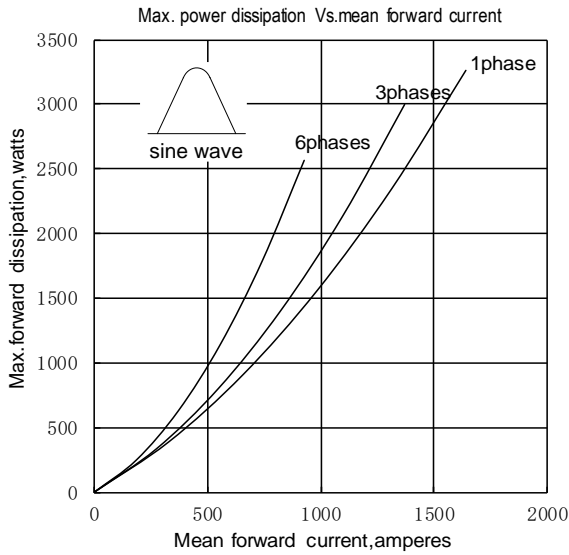


Fig.3

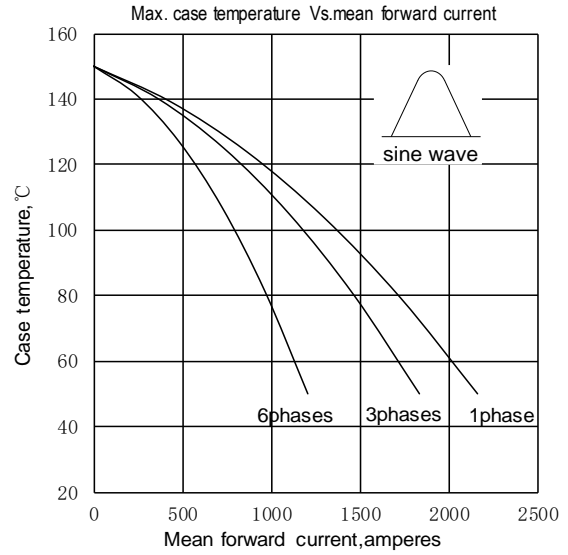


Fig.4

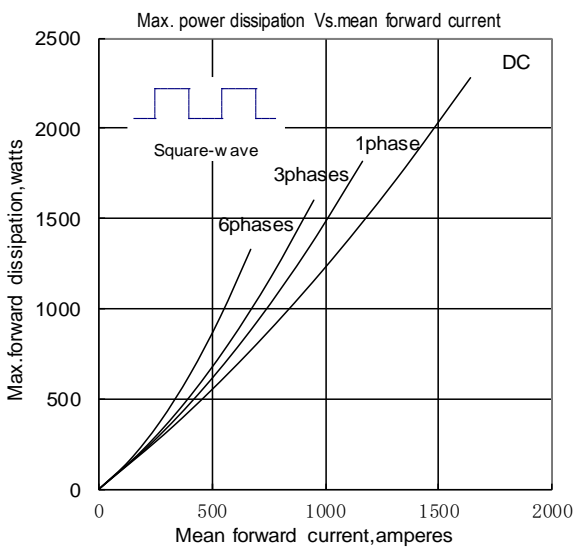


Fig.5

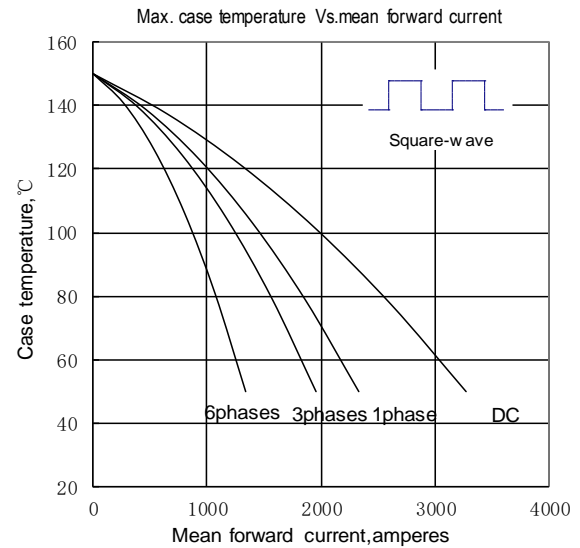


Fig.6


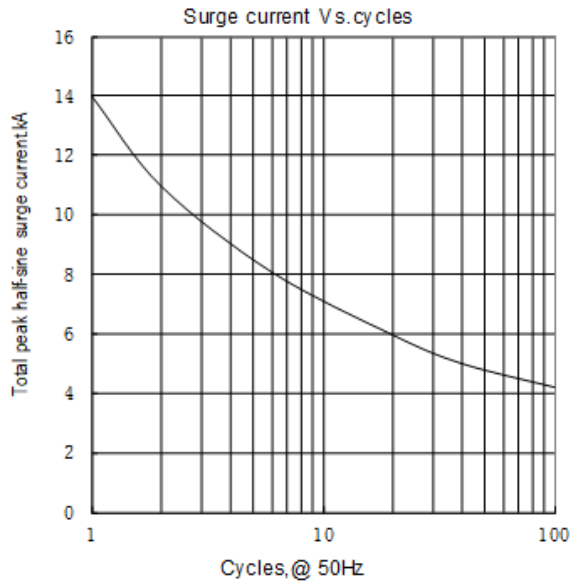


Fig.7

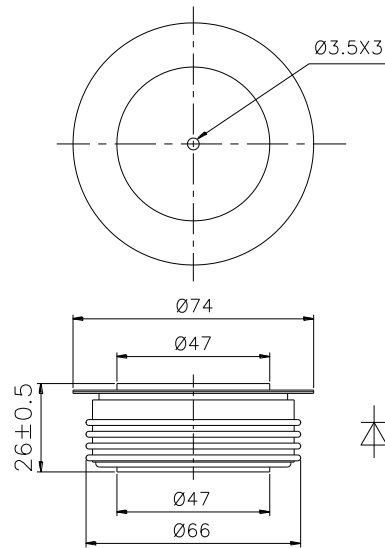

Nlps reserves the right to change specifications without notice.