

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

I_{T(AV)} **700A**
V_{DRM/V_{RRM}} **1100~1800V**
I_{TSM} **8.3 kA**
I²t **344 10³A²S**

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers



| SYMBOL | CHARACTERISTIC | TEST CONDITIONS | T _j (°C) | VALUE | | | UNIT |
|--------------------------------------|--|--|---------------------|-------|------|-------|----------------------------------|
| | | | | Min | Type | Max | |
| | | | | | | | |
| I _{T(AV)} | Mean on-state current | 180° half sine wave 50Hz Double side cooled, T _c =70°C | | | | 700 | |
| V _{DRM} V _{RRM} | Repetitive peak off-state voltage Repetitive peak reverse voltage | tp=10ms | 125 | 1100 | | 1800 | V |
| I _{DRM} I _{RRM} | Repetitive peak current | at V _{DRM} at V _{RRM} | 125 | | | 30 | mA |
| I _{TSM} | Surge on-state current | 10ms half sine wave V _R =0.6V _{RRM} | 125 | | | 8.3 | kA |
| I ² t | I ² t for fusing coordination | | | | | 344 | A ² s*10 ³ |
| V _{TO} | Threshold voltage | | 125 | | | 0.83 | V |
| r _T | On-state slope resistance | | | | | 0.53 | mΩ |
| V _{TM} | Peak on-state voltage | I _{TM} =1550A, F=7.0kN | 25 | | | 1.65 | V |
| dv/dt | Critical rate of rise of off-state voltage | V _{DM} =0.67V _{DRM} | 125 | | | 1000 | V/μs |
| di/dt | Critical rate of rise of on-state current | V _{DM} = 67%V _{DRM} to 800A, Gate pulse t _r ≤0.5μs I _{GM} =1.5A Repetitive | 125 | | | 100 | A/μs |
| Q _{rr} | Recovery charge | I _{TM} =800A, tp=2000μs, di/dt=-20A/μs, V _R =50V | 125 | | 1030 | | μC |
| I _{GT} | Gate trigger current | V _A =12V, I _A =1A | 25 | 35 | | 250 | mA |
| V _{GT} | Gate trigger voltage | | | 0.8 | | 2.5 | V |
| I _H | Holding current | | | 20 | | 200 | mA |
| V _{GD} | Non-trigger gate voltage | V _{DM} =0.67V _{DRM} | 125 | 0.3 | | | V |
| R _{th(j-c)} | Thermal resistance Junction to case | At 180° sine double side cooled Clamping force 7.0kN | | | | 0.045 | °C /W |
| R _{th(c-h)} | Thermal resistance case to heat sink | | | | | 0.010 | |
| m | Mounting force | | | 5.3 | | 10 | kN |
| T _{stg} | Stored temperature | | | -40 | | 140 | °C |
| W _t | Weight | | | | 80 | | g |
| Outline | | P02 | | | | | |

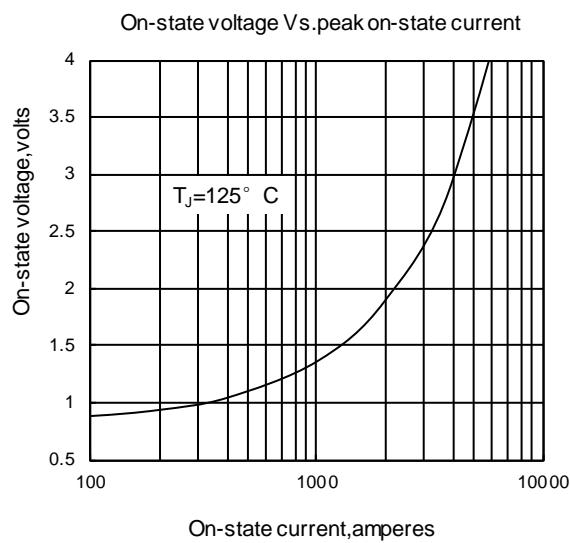


Fig1

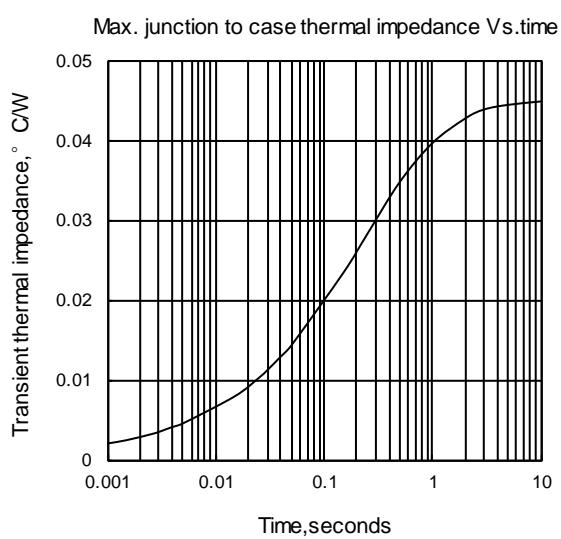


Fig2

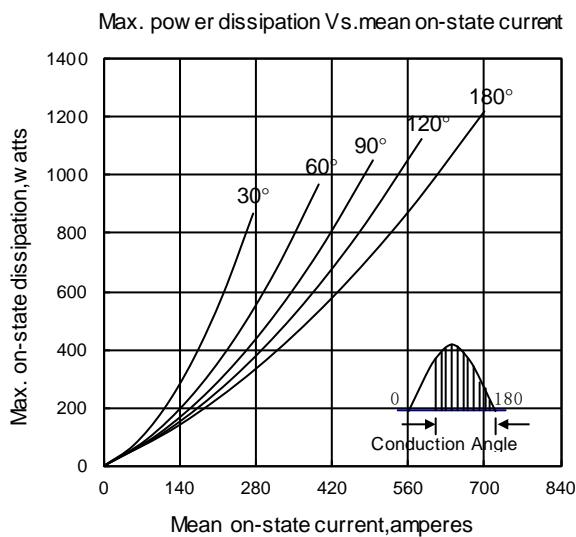


Fig3

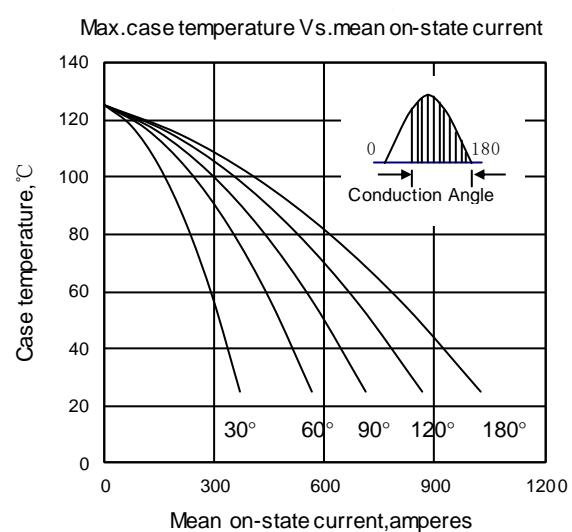


Fig4

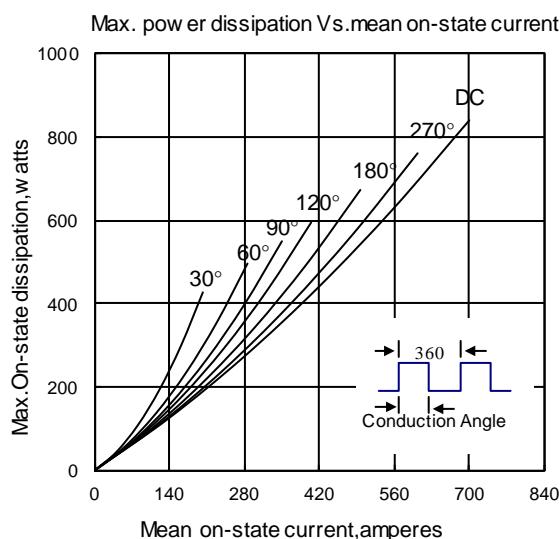


Fig5

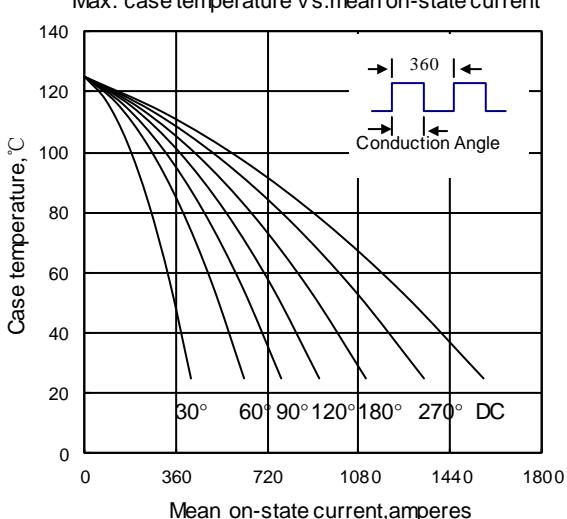


Fig6

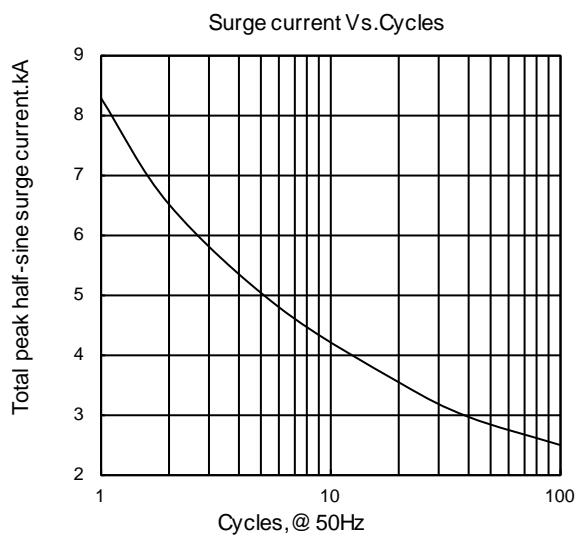


Fig7

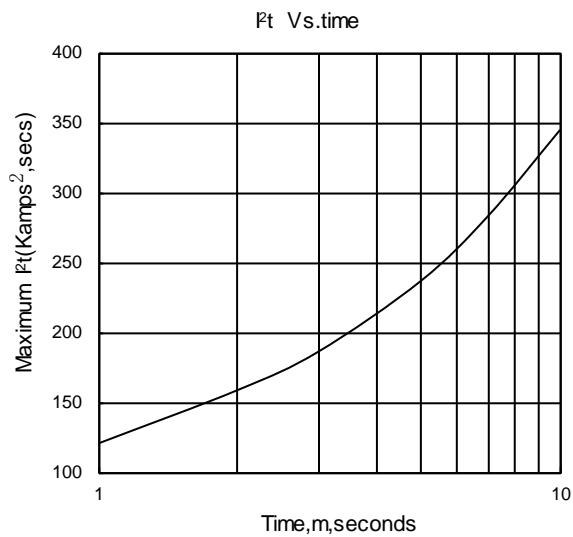


Fig8

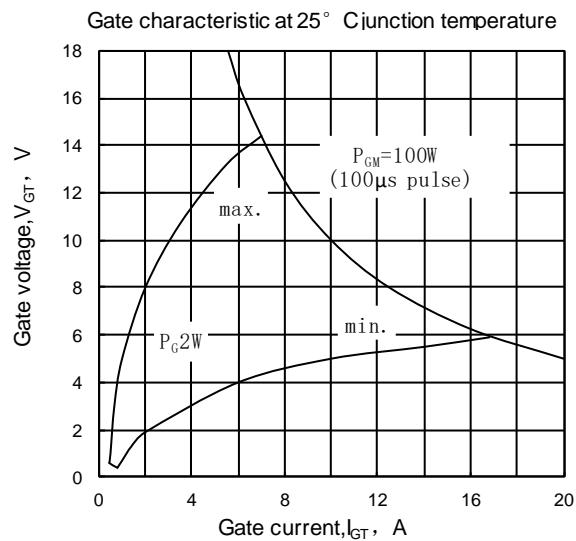


Fig9

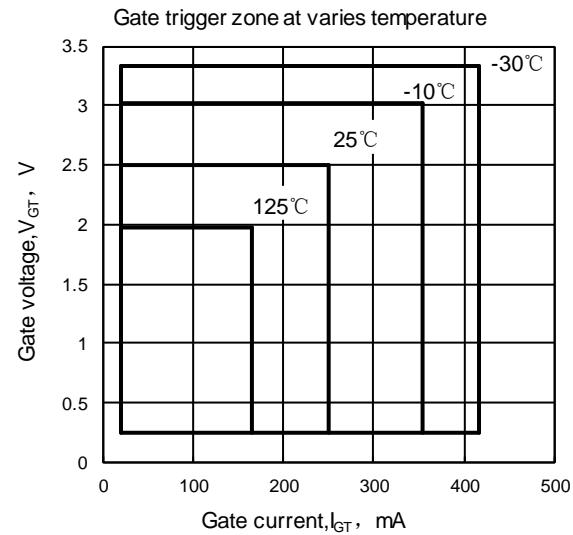


Fig10

