

**Features**

- Low forward voltage drop
- High reverse voltage
- Hermetic metal cases with ceramic insulators

**I<sub>F(AV)</sub>**      **860A**  
**V<sub>RRM</sub>**      **200~1000V**  
**I<sub>FSM</sub>**      **8 kA**  
**I<sup>2</sup>t**      **320 10<sup>3</sup>A<sup>2</sup>S**

**Typical Applications**

- All purpose high power rectifier diodes
- High power resistance welding equipment
- Non-controllable and half-controllable rectifiers
- Controlled rectifiers



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T <sub>j</sub> (°C)	VALUE			UNIT
				Min	Type	Max	
I <sub>F(AV)</sub>	Mean forward current	180° half sine wave 50Hz Double side cooled,	T <sub>C</sub> =85°C	190		860	A
V <sub>RRM</sub>	Repetitive peak reverse voltage	tp=10ms		190	200	1000	V
I <sub>RRM</sub>	Repetitive peak current	at V <sub>RRM</sub>		190		16	mA
I <sub>FSM</sub>	Surge forward current	10ms half sine wave V <sub>R</sub> =0.6V <sub>RRM</sub>	190			8	kA
I <sup>2</sup> t	I <sup>2</sup> t for fusing coordination					320	A <sup>2</sup> s*10 <sup>3</sup>
V <sub>FO</sub>	Threshold voltage		190			0.80	V
r <sub>F</sub>	Forward slope resistance					0.34	mΩ
V <sub>FM</sub>	Peak forward voltage	I <sub>FM</sub> =1930A, F=5.0kN	190			1.46	V
Q <sub>rr</sub>	Recovery charge	I <sub>FM</sub> =1000A, tp=2000μs, di/dt=-20A/μs, V <sub>R</sub> =50V	190		1400		μC
R <sub>th(j-c)</sub>	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 5.0kN				0.080	°C /W
R <sub>th(c-h)</sub>	Thermal resistance case to heat sink					0.020	
F <sub>m</sub>	Mounting force			3.3		5.5	kN
T <sub>stg</sub>	Stored temperature			-40		190	°C
W <sub>t</sub>	Weight				60		g
Outline		P32					

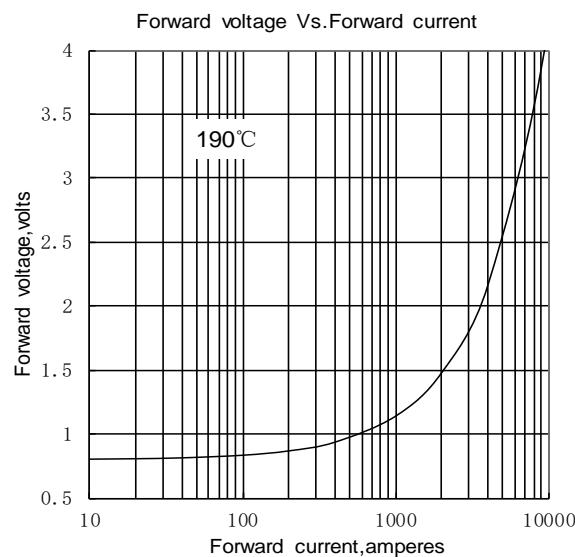


Fig1

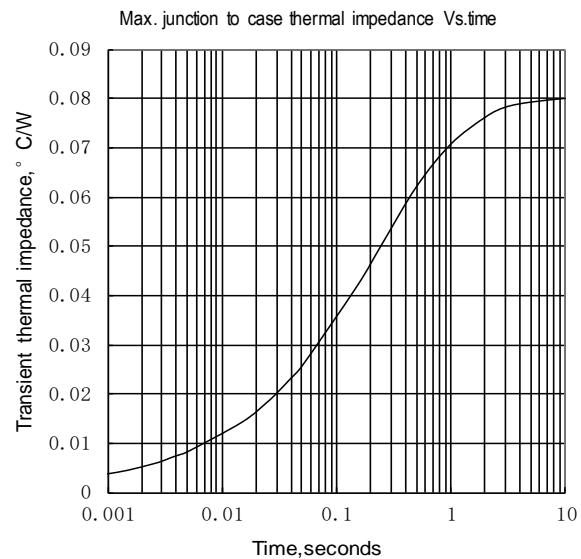


Fig2

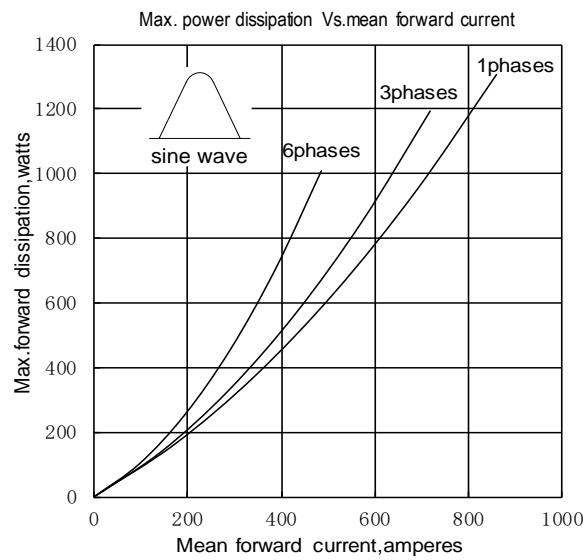


Fig3

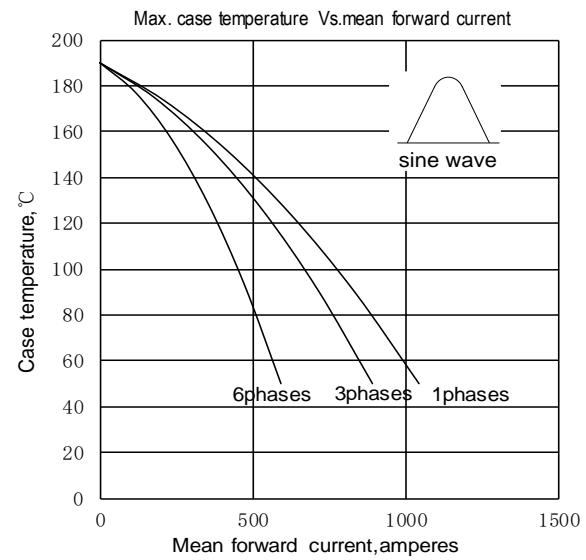


Fig4

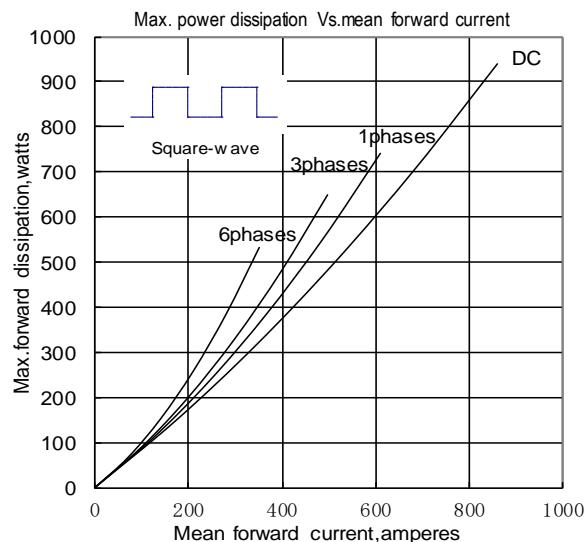


Fig5

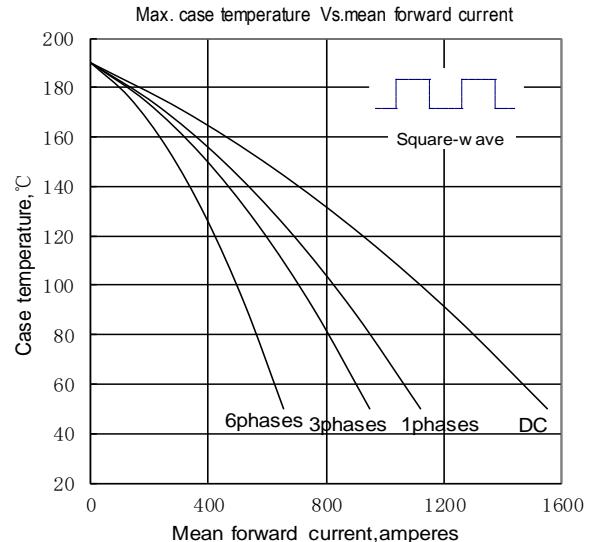


Fig6

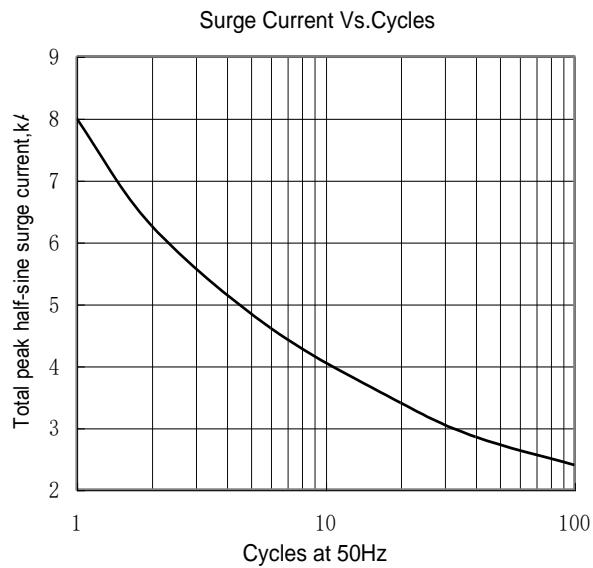


Fig.7

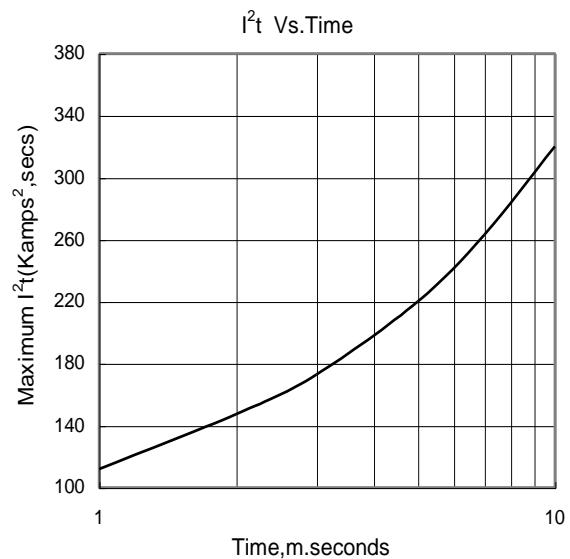


Fig.8

