

Features

- Center amplifying gate
- Metal case with ceramic insulator
- Low on-state and switching losses

I_{T(AV)} **450A**
V_{DRM/V_{RRM}} **400~1000V**
I_{TSM} **6.3 kA**
I²t **198.45 10³A²S**

Typical Applications

- AC controllers
- DC and AC motor control
- Controlled rectifiers



SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T _j (°C)	VALUE			UNIT
				Min	Type	Max	
I _{T(AV)}	Mean on-state current	180° half sine wave 50Hz Double side cooled				450	
V _{DRM} V _{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	tp=10ms	125	400		1000	V
I _{DRM} I _{RRM}	Repetitive peak current	at V _{DRM} at V _{RRM}	125			16	mA
I _{TSM}	Surge on-state current	10ms half sine wave	125			6.3	kA
I ² t	I ² t for fusing coordination	V _R =0.6V _{RRM}				198.45	A ² s*10 ³
V _{TO}	Threshold voltage		125			0.75	V
r _T	On-state slope resistance					0.70	mΩ
V _{TM}	Peak on-state voltage	I _{TM} =770A, F=5.0kN	25			1.29	V
dV/dt	Critical rate of rise of off-state voltage	V _{DM} =0.67V _{DRM}	125			1000	V/μs
di/dt	Critical rate of rise of on-state current	V _{DM} = 67%V _{DRM} to 800A, Gate pulse t _r ≤0.5μs I _{GM} =1.5A	125			100	A/μs
Q _{rr}	Recovery charge	I _{TM} =500A, tp=2000μs, di/dt=-20A/μs, V _R =50V	125		800		μC
I _{GT}	Gate trigger current		25	30		200	mA
V _{GT}	Gate trigger voltage	V _A =12V, I _A =1A		0.8		2.0	V
I _H	Holding current			20		150	mA
V _{GD}	Non-trigger gate voltage	V _{DM} =67%V _{DRM}	125	0.3			V
R _{th(j-c)}	Thermal resistance Junction to case	At 180° sine double side cooled Clamping force 5.0kN				0.080	°C /W
R _{th(c-h)}	Thermal resistance case to heat sink					0.020	
F _m	Mounting force				3.3	5.5	kN
T _{stg}	Stored temperature				-40	140	°C
W _t	Weight					60	g
Outline		P01					

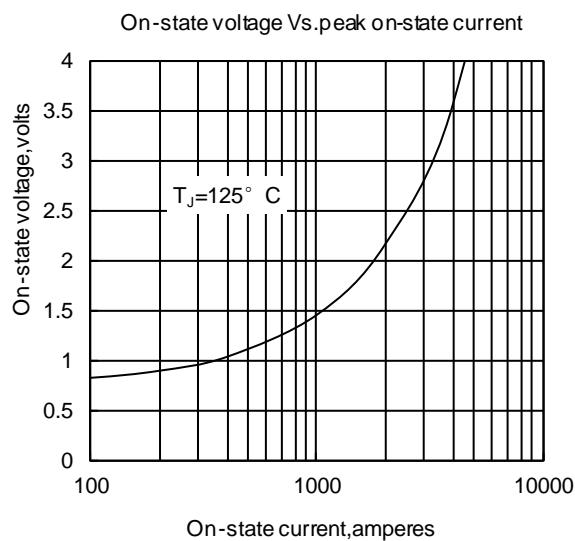


Fig1

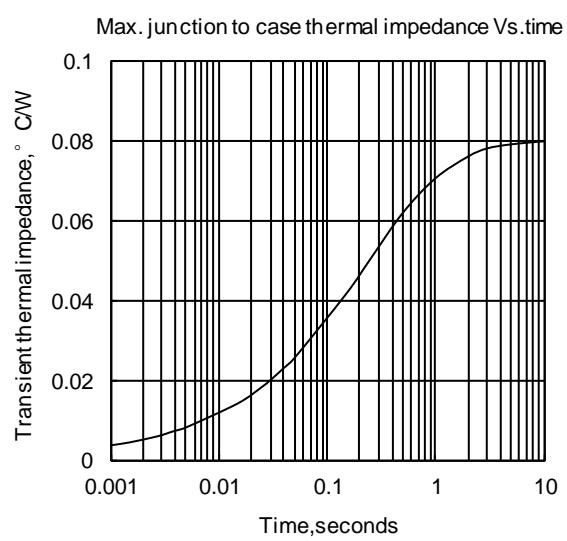


Fig2

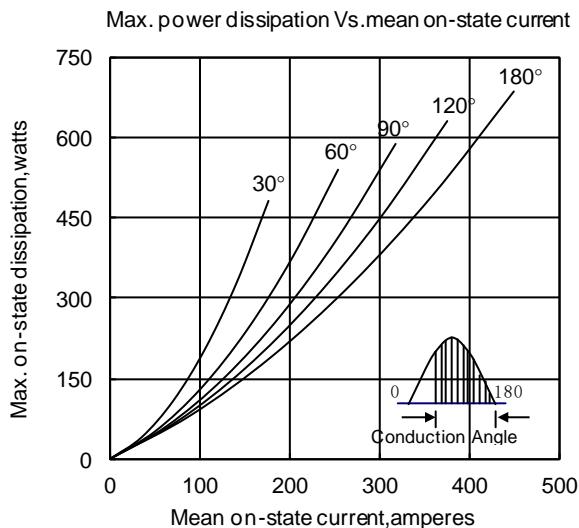


Fig3

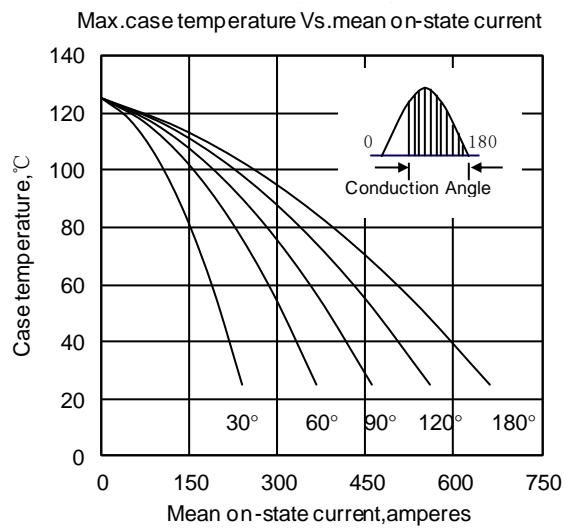


Fig4

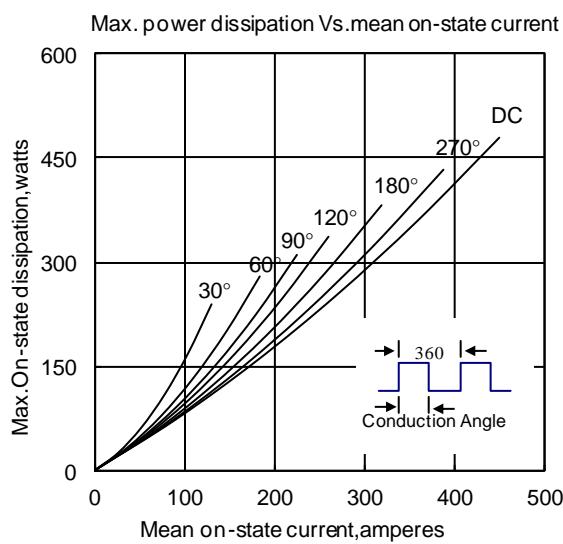


Fig5

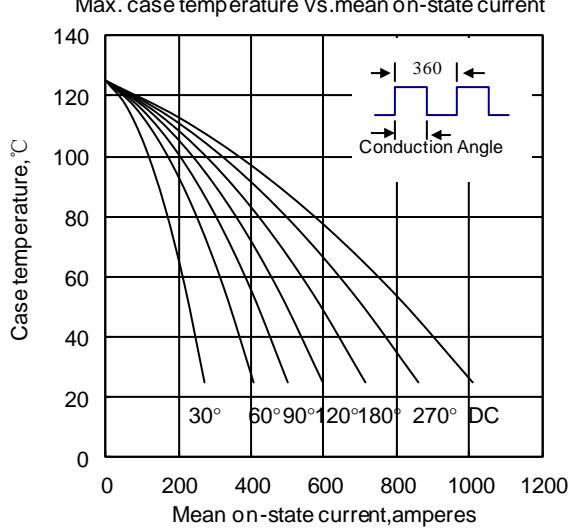


Fig6

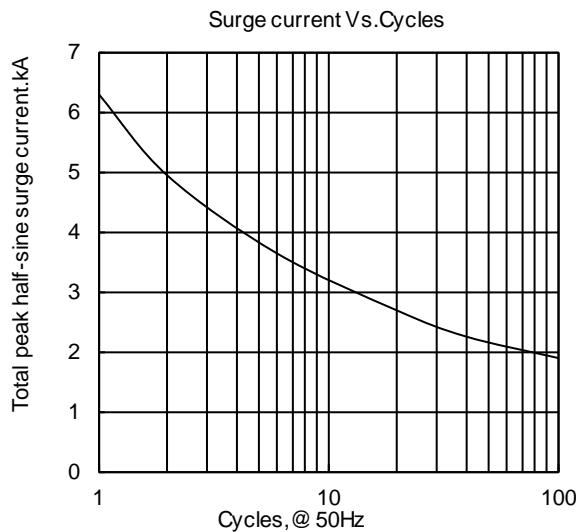


Fig7

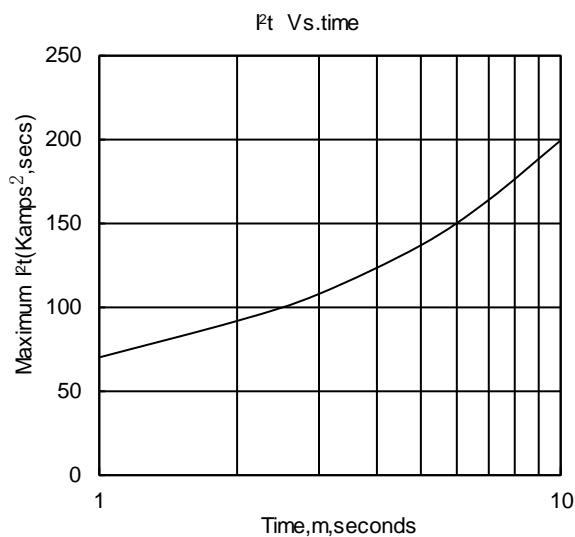


Fig8

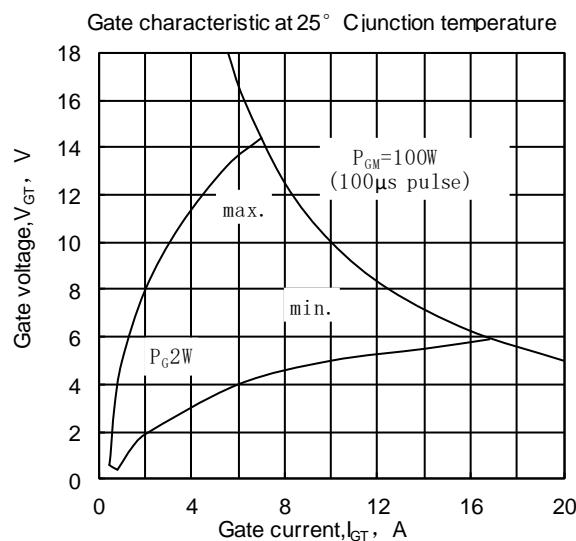


Fig9

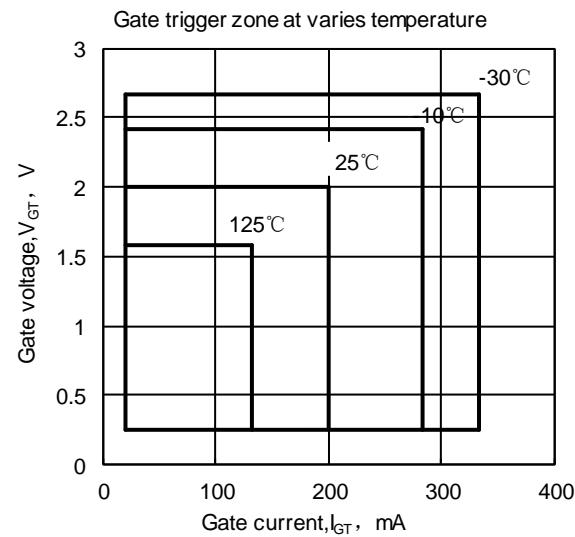


Fig10

